

# Temperature Measurement Cable ET910



## Features

- Accurate and reliable temperature measurement
- Measurement range  $-40...+85^{\circ}\text{C}$
- Up to 32 digital addressable 1-wire sensors
- IP67 water and dust protected design
- SWA protection tube

## Description

ET910 multipoint temperature measurement cable is developed for reliable temperature measurement in grain silos during product long term storage. The cables are installed vertically by suspension from silo ceiling or through the roof, by special fixing hooks or flanges.


Digital 1-wire temperature sensors with sequence detection function are used, so the physical position of each sensor in the cable is automatically detected.

ET910 temperature measurement cable is fully protected from water and dust and complies with ATEX requirements for Zone 20 and Zone 21 installations in grain silos.


## Specifications

Sensing element	Digital, 1-wire ( $\mu$ LAN interface)
Number of sensors in cable	up to 32
Interval between sensors	1...3 m
Measurement range	$-40...+85^{\circ}\text{C}$
Resolution	$0,0625^{\circ}\text{C}$
Accuracy	$< 0,5^{\circ}\text{C}$
Power supply	3,0...5,5 VDC
Connection	M12 4-pole female connector
Operating conditions	$-40...+85^{\circ}\text{C}$ , 0...100% RH, explosion safe areas and ATEX Zones 20 and 21
Protection class	IP67
Protection tube	$\varnothing 15$ mm steel wire armoured
Tensile Strength	30 kN (3 tonnes)

Ask for other versions or custom designed products

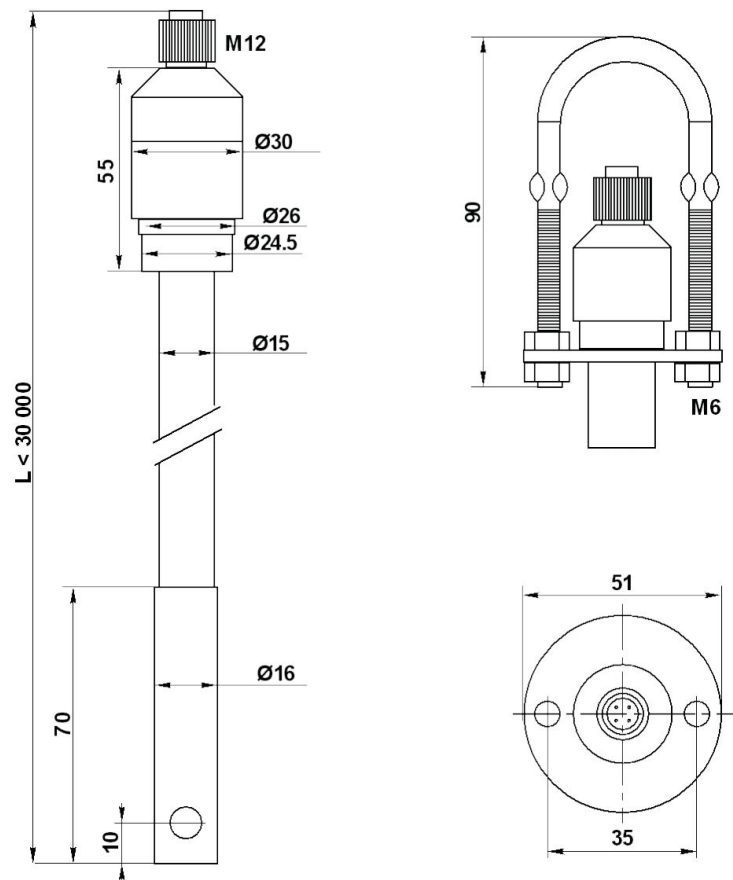

Upper holder assembly

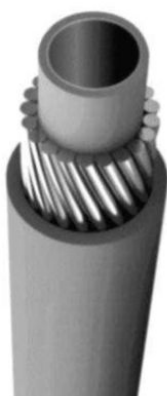

Steel Wire Armoured protection tube



Lower end assembly



Rooftop holding plate assembly