

More Precision.



optris® CX hs

Infrared thermometer for measurement of smallest temperature differences of 0,025°C



FEATURES

- New benchmark in low noise IR-thermometry
- Suitable for relative measurement of smallest temperature differences of 0,025°C
- Touches the physical limits ensuring low ambient temperature drift
- Complete solid state design without any moving parts
- Assures usability of a new class of ultra low noise level IR thermometers

General specifications

Environmental rating	IP 65 (NEMA-4)
Ambient temperature	-20 - 75° C
Storage temperature	-40 - 85° C
Relative humidity	10 - 95 %, non condensing
Vibration	IEC 68-2-6: 3 G, 11-200 Hz, any axis
Shock	IEC 68-2-27: 50 G, 11 ms, any axis
Weight	350 g

Electrical specifications

Output /analog	4 - 20 mA
Output / alarm	0-30 V / 500 mA (open collector)
Outputs/digital (optional)	USB
Loop impedance	max. 1000Ω ¹⁾
Cable length	8 m
Power supply	5 - 30 V DC

1) in dependence on supply voltage

Measurement specifications


Temperature range (scalable via software)	-20 - 150°C
Spectral range	8 - 14 μm
Optical resolution	15:1
CF-Optics (optional)	0.8 mm @ 10 mm
System accuracy (at ambient temperature 23 ±5°C and object temperature > 20 °C)	±1 % or ±1 °C ¹
Repeatability (at ambient temperature 23 ±5°C and object temperature > 20 °C)	±0.3 % or ±0.3°C ¹
Temperature resolution	0.025 K (for temperatures > 20°C, AVG > 0,2 s)
Response time (95%)	150 ms (adjustable up to 999 s via optional programming device)
Emissivity/Amplification (adjustable via software)	0.100 - 1.100
Transmissivity (adjustable via software)	0.100 - 1.100
Signal processing (parameter adjustable only via optional software)	peak hold, valley hold, average; extended hold function with threshold and hysteresis

¹ whichever is greater


optris® CX hs

Optical specifications

15:1 optics with CF-lens

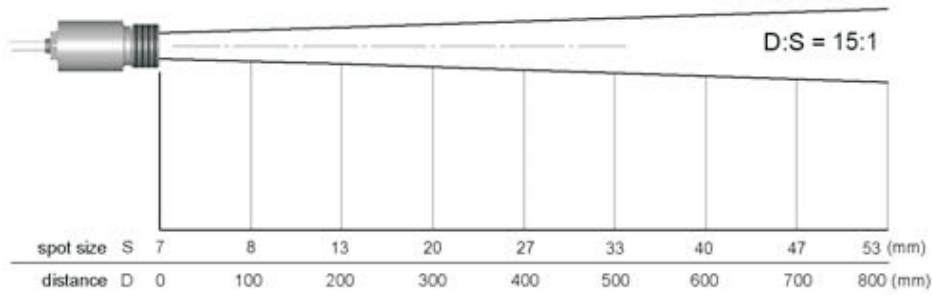


15:1 optics

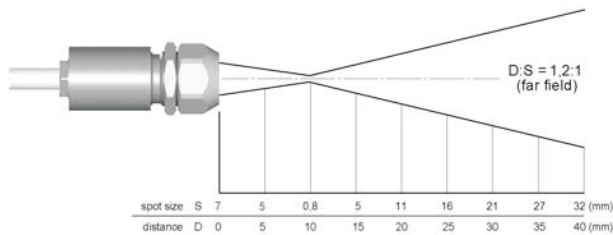


S=Spotsize
D=Distance


Dimensions

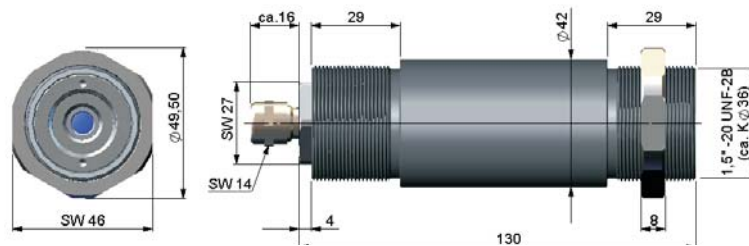

Accessories

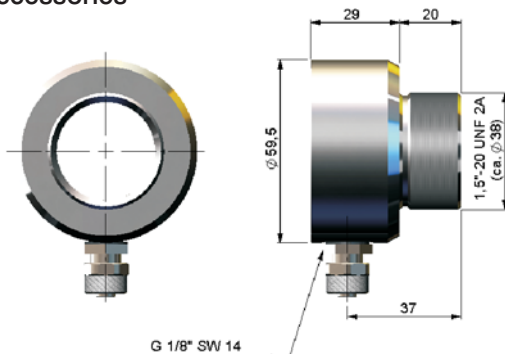


Air purge collar

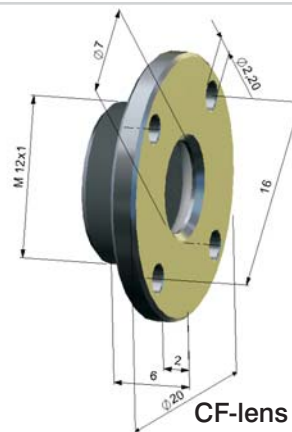

CF-lens / Protective window

CompactConnect Software

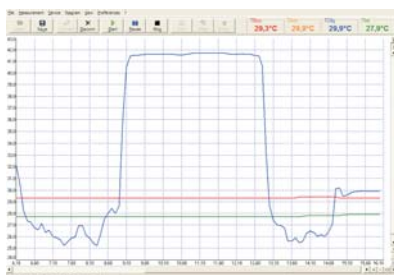

- Software for easy sensor setup and remote controlling, supports multi tasking
- Graphic display for temperature trends and automatic data logging for analysis and documentation with 1 ms response time
- Adjustment of signal processing functions and programming of outputs of the sensor
- Automatic emissivity adjustment
- The software CompactConnect allows to customize the sensor to application needs of the user

Optris GmbH

Ferdinand-Buisson-Str. 14
13127 Berlin/Germany

Tel. +49 (0) 30 500 197-0
Fax +49 (0) 30 500 197-10

info@optris.de
www.optris.de

Development and sales of portable and stationary infrared measuring instruments.

Specifications are subject to change without notice.
CXhs-DS-E2008-07-A

