

HD3817T... HD38V17T...

- ▶ [I]
Trasmettitore attivo di umidità assoluta e temperatura
- ▶ [GB]
Absolute humidity and temperature active transmitter
- ▶ [E]
Transmisor activo de humedad absoluta y de temperatura
- ▶ [F]
Transmetteur actif d'humidité absolue et température
- ▶ [D]
Aktiver Transmitter für absolute Feuchte und Temperatur



[GB] Description

The HD3817T... and HD38V17T... are double **absolute humidity** and **temperature** active transmitters with 4...20mA current or 0...10Vdc voltage outputs, respectively. Absolute humidity is the ratio between the mass of water vapour and the measured volume of air, and is expressed in g/m³. The transmitters of the HD3817T... family may be used in materials humidity control during a drying process. When the materials are dried through heating or a hot air flow, the air absolute humidity increase is directly proportional to the quantity of water lost by the materials. A control system measuring absolute humidity, can maintain a certain humidity level by injecting vapour or water spray in the environment, if needed. Generally, these transmitters are employed in the chemical, textile, food industry, in the production and storage of paper, in the drying of wood,... even with high temperatures and wide humidity excursions. The type of sensor used is immune to most physical and chemical contaminants. The maximum working temperature is 200°C: This makes these instruments particularly suitable to heavy industrial applications where the traditional capacitive sensor cannot be used. The response time is fast, as well as the recovery time from saturation. The maximum measurement ranges are: 0...130 g/m³ for absolute humidity and -50...200°C for temperature: The instruments come out of the factory with the 0...60g/m³ and 0...200°C standard ranges. You can request, **when making the order**, different ranges both for absolute humidity and temperature, but within the set limits. The standard power supply is 24VAC. On request, we can supply the 115VAC or 230VAC versions. The probe, completely in stainless steel, has a 20µm sintered bronze filter. The case is in polycarbonate with an IP66 protection degree.

Technical Information


ABSOLUTE HUMIDITY	Type of sensor	Heat conductivity with double combined NTC.
	Sensor protection	20µm sintered bronze filter AISI304
	Measurement range	0...130 g/m³ (0...100% RH @60°C and 1013hPa) (*)
	Sensor working range	0 ... +200°C
	Accuracy	±3g/m³ to 35 g/m³ and 40°C
	Startup stabilization time	120 seconds
	Response time	60 seconds with standard filter for a 63% variation of the final value
	Repeatability	±5%
TEMPERATURE	Sensors type	4 wire Pt100
	Measurement range	0 ... +200°C
	Accuracy	1/3 DIN
	Response time	10 seconds for a 63% variation of the final value
Analog outputs (according to the models)	4...20mA (HD3817T...)	R _L < 500Ω
	0...10Vdc (HD38V17T...)	R _L > 10kΩ
GENERAL	Power supply voltage	24Vac ±10% 50...60Hz On request, 115Vac or 230Vac ±10% 50...60Hz
	Consumption	4VA typical
	Temperature / Electronic Working Humidity	-10°C ... +70°C / 5...90% RH without condensation
	Case size	120x80x55 mm
	Protection Degree	IP66 probe excluded
	Case material	Polycarbonate
	Probe material	Stainless steel AISI304

(*) **Note:** The 0...130g/m³ range is referred to a 60°C temperature. The absolute humidity maximum value varies with environment temperature according to the following diagram




Diagram of the absolute humidity and temperature outputs

The graphs of the absolute humidity and temperature outputs are reported below.

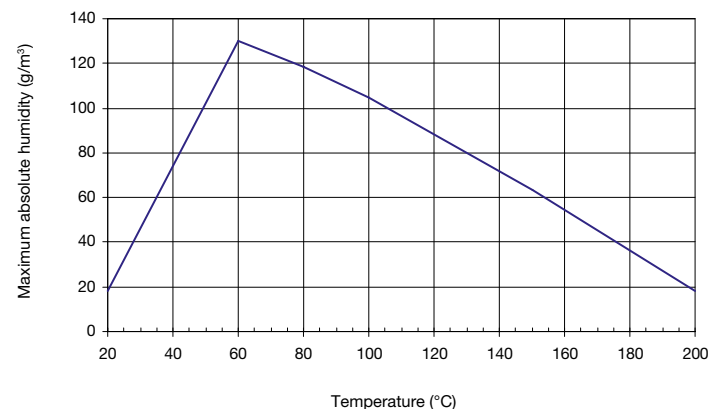


Absolute humidity (g/m³)

4...20mA current output according to 0...60g/m³ standard range

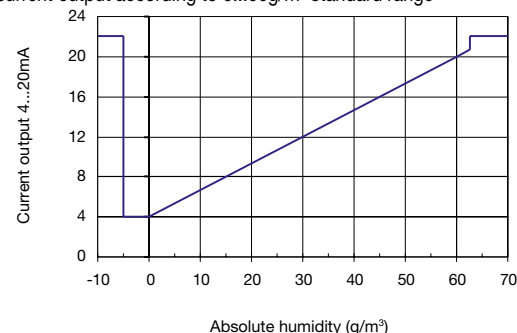


Temperature (°C)

4...20mA current output according to 0...200°C standard range

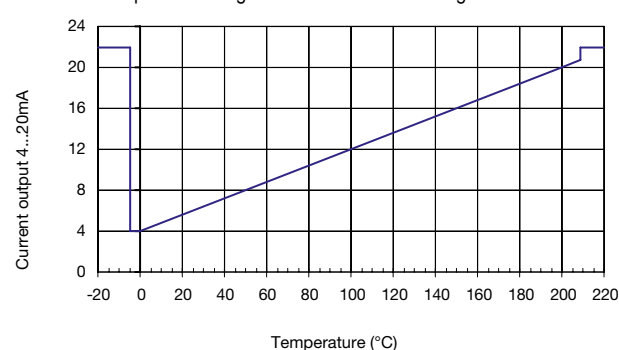


Absolute humidity (g/m³)

0...10Vdc voltage output according to 0...60g/m³ standard range

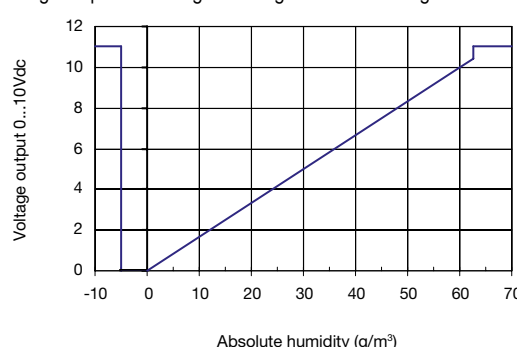


Temperature (°C)

0...10Vdc voltage output according to 0...200°C standard range

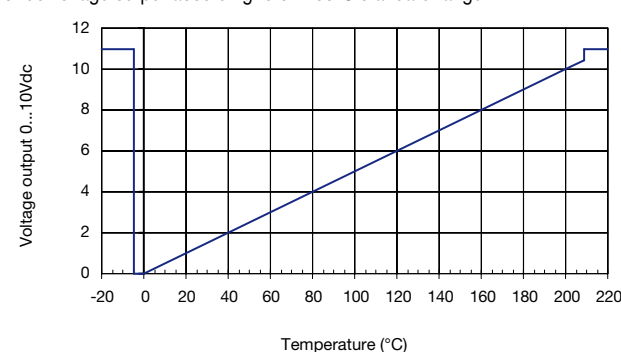


Calibration
The instruments are calibrated in the factory; no calibration is required by the user.


Installation Notes
Each probe is calibrated in the factory with its transmitter: **A probe cannot be used onto another transmitter.** The transmitter has to be installed into a position with good air circulation. The probe orientation is not important.
To set the probe in a ventilation channel, into a duct, inside a dryer, etc. you can use the HD9008.31.12 flange, a PG16 (Ø10...14mm) metallic fairlead or a 3/8" biconical universal fitting.



HD9008.31.12 flange




PG16.12 metallic fairlead
D = 14 mm
L = 6.5 mm
H = 23 mm
A = PG16



Biconical universal fitting
L = 35 mm
D = 14 mm
A = 3/8"

Electric connection


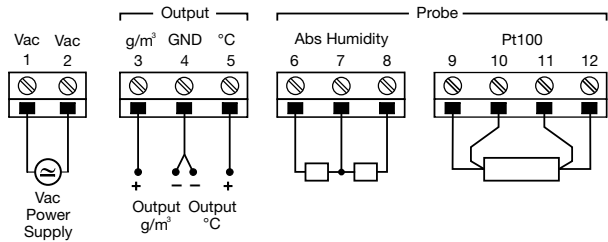


Power
Apply power to the instrument with the correct VAC voltage between the power supply terminals ① and ②.
Connection of the absolute humidity and temperature probe
Connect the probe respecting the colours and the numbers in the following table:

Function	Terminal Number	Cable Colour
Absolute Humidity	6	Red
	7	White
	8	Yellow
Pt100 Temperature	9	Blue
	10	Blue
	11	Black
	12	Black

Analog outputs
The output signals are acquired between the terminals:
③=g/m³ and ④=GND for absolute humidity,
⑤=°C and ④=GND for temperature.

Dimensions

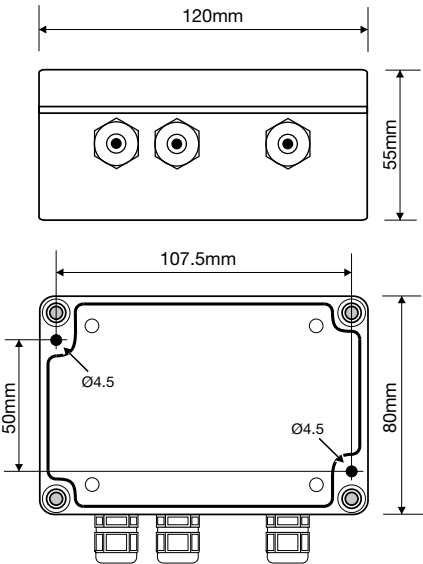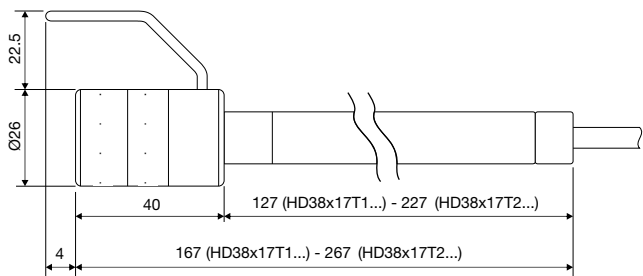

Order codes
HD3817T...: Absolute humidity and Pt100 temperature double transmitter. Analog outputs 4...20mA. Measurement range of absolute humidity 0...60g/m³, temperature 0...+200°C (on request, when making the order, other outputs in the ranges 0...130g/m³ and 0...+200°C). Probe with 20µm sintered bronze filter AISI304. Electronic working temperature -10°...+70°C. Probe working temperature 0C°...+200°C.
When making the order, please specify: 1) Power supply. 2) Stem length 127 mm or 227 mm. 3) Probe's cable length 2 m or 5 m.
HD38V17T...: Absolute humidity and Pt100 temperature double transmitter. Analog outputs 0...10Vdc. Measurement range of absolute humidity 0...60g/m³, temperature 0...+200°C (on request, when making the order, other outputs in the ranges 0...130g/m³ and 0...+200°C). Probe with 20µm sintered bronze filter AISI304. Electronic working temperature -10°...+70°C. Probe working temperature 0C°...+200°C.
When making the order, please specify: 1) Power supply. 2) Stem length: 127 mm or 227 mm. 3) Probe's cable length: 2 m or 5 m.

Relations between absolute humidity, relative humidity and mixing ratio

$$\%RH = \frac{100 \cdot E}{Es}$$
$$AH = \frac{804 \cdot E}{(1+0.00366 \cdot T) \cdot P_0}$$
$$MR = \frac{0.622 \cdot E}{P_0 - E}$$

%RH = % of relative humidity
AH = Absolute humidity in g/m³
MR = Mixing ratio in water vapour kg per air kg
E = Current value of vapour pressure in air in Pascal
Es = Saturated vapour pressure in air in Pascal
P₀ = Atmospheric pressure in Pascal
T = Temperature in Celsius degrees
The Es value can be obtained from a psychrometric table

HD38 X 17T X CX . X

Power
0 = Standard 24VAC power supply
1 = 115VAC power supply
2 = 230VAC power supply

Cable length
C2 = Cable 2 meters
C5 = Cable 5 meters

Stem length:
1 = Stem length 127 mm
2 = Stem length 227 mm

Analog output
No number = Current analog output 4...20mA
V = Voltage analog output 0...10VDC

Manufacture of portable and bench top instruments
Current and voltage loop transmitters
Temperature - Humidity - Pressure
Air speed - Light - Acoustics
pH - Conductivity - Dissolved Oxygen - Turbidity
Elements for weather stations - Thermal Microclimate



SIT CENTRE N°124

Temperature - Humidity - Pressure - Air speed
Photometry/Radiometry - Acoustics

CE CONFORMITY

- **Safety:** EN61000-4-2, EN61010-1 Level 3
- **Electrostatic discharge:** EN61000-4-2 Level 3
- **Electric fast transients:** EN61000-4-4 livello 3, EN61000-4-5 Level 3
- **Voltage variations:** EN61000-4-11
- **Electromagnetic interference susceptibility:** IEC1000-4-3
- **Electromagnetic interference emission:** EN55020 class B

