

Rugged fiber-optic ratio thermometer for non-contact temperature measurement from 250 °C to 3000 °C (482 °F to 5432 °F)



Features:

- Adjustable focus from 300 mm (11.81 in) to infinity with excellent optical resolution up to 100:1
- Laser sighting for real spot size indication at any distance - green laser for best visibility on glowing objects
- Rugged sensing head and fiber-optic for ambient temperatures up to 315 °C (599 °F) without cooling
- Two 0/4-20 mA analog outputs (isolated optional)
- Fast measurement with 1 ms response time

General specifications		Measurement specifications		
Environmental rating	IP 65 (NEMA-4)	Temperature range	1-Channel	2-Channel
Ambient temperature sensing head + fiber cable electronics	-20 ... 200 °C (-4 ... 392 °F) (optional to 315 °C [599 °F]) 0 ... 50 °C (32 ... 122 °F)		250 ... 1000 °C (482 ... 2552 °F)	275 ... 1000 °C (527 ... 2552 °F) (2ML)
Storage temperature sensing head + fiber cable electronics	-40 ... 200 °C (-40 ... 392 °F) -40 ... 85 °C (-40 ... 185 °F)		375 ... 1500 °C (707 ... 3632 °F)	400 ... 1500 °C (752 ... 3632 °F) (2MH)
Relative humidity	10 – 95 %, non-condensing		500 ... 3000 °C (1652 ... 5432 °F)	550 ... 3000 °C (1022 ... 5432 °F) (2MH1)
Vibration (sensor)	IEC 60068-2-6 (sinus shaped), IEC 60068-2-64 (broad band noise)	Spectral range	1.45 – 1.75 µm	
Shock (sensor)	IEC 60068-2-27 (25G and 50G)	Optical resolution (90 % energy)	38:1 (2ML) 50:1 (2MH) 100:1 (2MH1)	
Weight	210 g (7.4 oz) (fiber cable (3 m[9.8 ft]) with head) 420 g (14.8 oz) (electronics)	Vario focus	300 mm (11.81 in) to infinity, infinitely adjustable	
Electrical specifications		System accuracy ²⁾ (at ambient temp. 23 ±5 °C)	±(0.5 % of reading +2 °C)	
Outputs analog	2x 0/4-20 mA (12 bit) / optional: 2x 0/4-20 mA (16 bit) isolated	Repeatability ²⁾ (at ambient temp. 23 ±5 °C)	±0.3 % of reading	
Output impedances	max. 500 Ω (with 8 – 30 V DC)	Temperature resolution	0.1 K	
Relay Output (optional)	2 x 60 V DC/ 42 V AC _{eff} ; 0.4 A; optically isolated	Response time (90 % signal) ³⁾	1 ms – 10 s	
Digital Interface	USB (Micro-USB, USB-C and USB-A cable included)	Slope (adjustable via programming keys or analog input)	0.800 – 1.200	
Digital Interfaces (optional)	RS232, RS485	Emissivity (adjustable via programming keys or analog input)	0.050 – 1.000	
I/O-Pins	Three programmable in-/outputs; selectable as alarm output (open collector 24 V/1 A), input for triggered signal output and peakhold function or as analog input for external emissivity or slope adjustment	Signal processing (parameter adjustable via programming keys or software / App, respectively)	1 color / 2 color mode; attenuation monitoring / alarms; peak hold, valley hold, average; extended hold function with threshold and hysteresis	
Fiber cable length	3 m (standard), 8 m, 15 m (9.8 ft [standard], 19.7 ft, 32.8 ft)	Software / App	optris Ratio Connect / IRmobile App	
Power supply	8 – 30 V DC or USB powered ¹⁾	1) USB powered unit works only in digital communication mode		
Power consumption	Max. 5 W	2) ε = 1, response time 1 s; no attenuation / Specification valid for 5 - 95% of measurement range		
Aiming laser	Laser 520 nm, <1 mW, ON/OFF via electronic box or software / App	3) With dynamic adaptation to low signal levels		

TECHNICAL DATA


Software / App



Windows-software: optris Ratio Connect

Dimensions

Dimensions in mm (in)

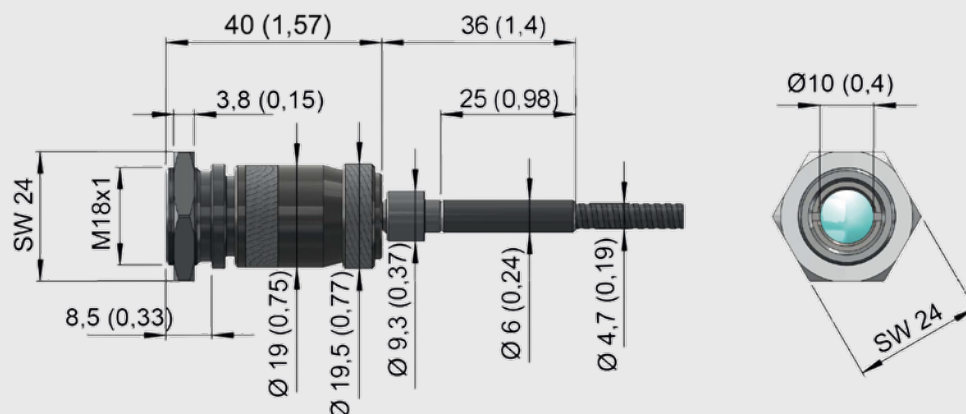

Dimensions in mm (in)

