



DMP 331i DMP 333i

Precision Pressure Transmitter

Stainless Steel Sensor

accuracy according to IEC 60770:
0.1 % FSO

Nominal pressure

from 0 ... 400 mbar up to 0 ... 600 bar

Output signal

2-wire: 4 ... 20 mA

3-wire: 0 ... 10 V

others on request

Product characteristics

- ▶ thermal error in compensated range
-20 ... 80 °C: 0.2 % FSO
TC 0.02 % FSO / 10K
- ▶ Turn-Down 1:10
- ▶ communication interface for adjusting
of offset, span and damping

Optional versions

- ▶ IS-versions
Ex ia = intrinsically safe for gases and
dusts
- ▶ adjustment of nominal pressure
gauges (factory-provided)

The precision pressure transmitter DMP 331i and DMP 333i demonstrate the further development of our industrial pressure transmitters.

The signal processing of sensor signal is done by digital electronics with 16-bit analog digital converter. Consequently it is possible to conduct an active compensation and the transmitters with excellent measurements and exceptionally attractive price to offer on the market.

Preferred areas of use are



Laboratory Techniques



Energy production (gas consumption
and thermal energy measurement)



Pressure ranges DMP 331 i ¹									
Nominal pressure gauge / absolute	[bar]	0.4	1	2	4	10	20	40	60
Overpressure	[bar]	2	5	10	20	40	80	105	105
Burst pressure	[bar]	3	7,5	15	25	50	120	210	210
Vacuum ranges									
Nominal pressure	[bar]	-0.4 ... 0.4		-1 ... 1		-1 ... 2		-1 ... 4	
Overpressure	[bar]	2		5		10		20	
Burst pressure	[bar]	3		7.5		15		25	
Pressure ranges DMP 333 i ¹									
Nominal pressure gauge / absolute	[bar]	100			200		400		600
Overpressure	[bar]	210			600		1000		1000
Burst pressure	[bar]	420			1000		1250		1250
¹ On customer request we adjust the device within the turn-down-possibility by software on the required pressure range.									
Output signal / Supply									
Standard	2-wire: 4 ... 20 mA / V _S = 12 ... 36 V _{DC}								
Option IS-protection	2-wire: 4 ... 20 mA / V _S = 14 ... 28 V _{DC}								
Options analog signal	2-wire: 4 ... 20 mA with communication interface ²								
	3-wire: 0 ... 10 V / V _S = 14 ... 36 V _{DC}								
	0 ... 10 V with communication interface ²								
² only possible with el. connection Binder series 723 (7-pin)									
Performance									
Accuracy performance after turn-down - TD ≤ 1:5 - TD > 1:5	IEC 60770 ³ : ≤ ± 0.1 % FSO no change of accuracy ⁴ for calculation use the following formula (for nominal pressure ranges ≤ 0.40 bar see note 4): ≤ ± [0.1 + 0.015 x turn-down] % FSO with turn-down = nominal pressure range / adjusted range e.g. with a turn-down of 1:10 following accuracy is calculated: ≤ ± (0.1 + 0.015 x 10) % FSO i.e. accuracy is ≤ ± 0.25 % FSO								
Permissible load	current 2-wire: R _{max} = [(V _S – V _S min) / 0.02 A] Ω voltage 3-wire: R _{min} = 10 kΩ								
Influence effects	supply: 0.05 % FSO / 10 V load: 0.05 % FSO / kΩ								
Long term stability	≤ ± (0.1 x turn-down) % FSO / year at reference conditions								
Response time	approx. 5 msec								
Adjustability	configuration of following parameters possible (interface / software necessary ⁵): - electronic damping: 0 ... 100 sec - offset: 0 ... 90 % FSO - turn down of span: max. 1:10								
³ accuracy according to IEC 60770 – limit point adjustment (non-linearity, hysteresis, repeatability)									
⁴ except nominal pressure ranges ≤ 0.40 bar; for these calculation of accuracy is as follows: ≤ ± (0.1 + 0.02 x turn-down) % FSO e.g. turn-down of 1:3: ≤ ± (0.1 + 0.02 x 3) % FSO i.e. accuracy is ≤ ± 0.16 % FSO									
⁵ software, interface, and cable have to be ordered separately (software appropriate for Windows® 95, 98, 2000, NT Version 4.0 or higher, and XP)									
Thermal effects (Offset and Span) / Permissible temperatures									
Tolerance band [% FSO]	≤ ± (0.2 x turn-down) in compensated range -20 ... 80 °C								
TC, average [% FSO / 10 K]	± (0.02 x turn-down) in compensated range -20 ... 80 °C								
Permissible temperatures	medium: -25 ... 125 °C electronics / environment: -25 ... 85 °C storage: -40 ... 100 °C								
Electrical protection									
Short-circuit protection	permanent								
Reverse polarity protection	no damage, but also no function								
Electromagnetic compatibility	emission and immunity according to EN 61326								
Materials									
Pressure port	stainless steel 1.4404 (316 L)								
Housing	stainless steel 1.4404 (316 L)								
Seals	FKM; NBR welded version ⁶ others on request								
Diaphragm	stainless steel 1.4435 (316L)								
Media wetted parts	pressure port, seal, diaphragm								
⁶ welded version only with pressure ports according to EN 837: welded version not available with pressure ranges > 60 bar									


Mechanical stability		
Vibration		10 g RMS (20 ... 2000 Hz)
Shock		100 g / 11 msec.
Explosion protection (only for 4 ... 20 mA / 2-wire)		
Approvals	DX19-DMP 331i DX19-DMP 333i	IBExU 10 ATEX 1068 X / IECEx IBE 12.0027X zone 0: II 1G Ex ia IIC T4 Ga

⁷ Pressure transmitters are calibrated in a vertical position with the pressure connection down. If this position is changed on installation there can be slight deviations in the zero point for pressure ranges $P_N \leq 1 \text{ bar}$.


⁸ This directive is only valid for devices with maximum permissible overpressure > 200 bar

Wiring diagrams

2-wire-system (current)

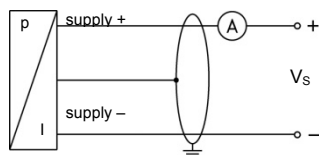

3-wire-system (voltage)

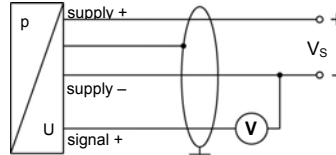


Pin configuration

Electrical connections		ISO 4400	Binder 723 (5-pin)	Binder 723 (7-pin)	M12x1 / metal (4-polig)	Bayonet MIL-C-26482 (10-6)		field housing	cable colours (IEC 60757)
						2-wire	3-wire		
supply +		1	3	3	1	A	A	IN +	wh (white)
supply -		2	4	1	2	B	D	IN -	bn (brown)
signal + (only for 3-wire)		3	1	6	3	-	B	OUT +	gn (green)
shield		ground pin	5	2	4	pressure port			gnye (green-yellow)
Communication interface ⁹	RxD	-	-	4	-	-	-	-	-
	TxD	-	-	5	-	-	-	-	-
	GND	-	-	7	-	-	-	-	-

⁹ may not be transmitted directly with the PC (the suitable adapter is available as accessory)

Electrical connections (dimensions in mm / inch)


standard

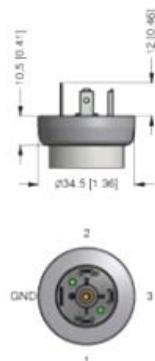

ISO 4400
(IP65)

Electrical connections (dimensions in mm / inch)

optional

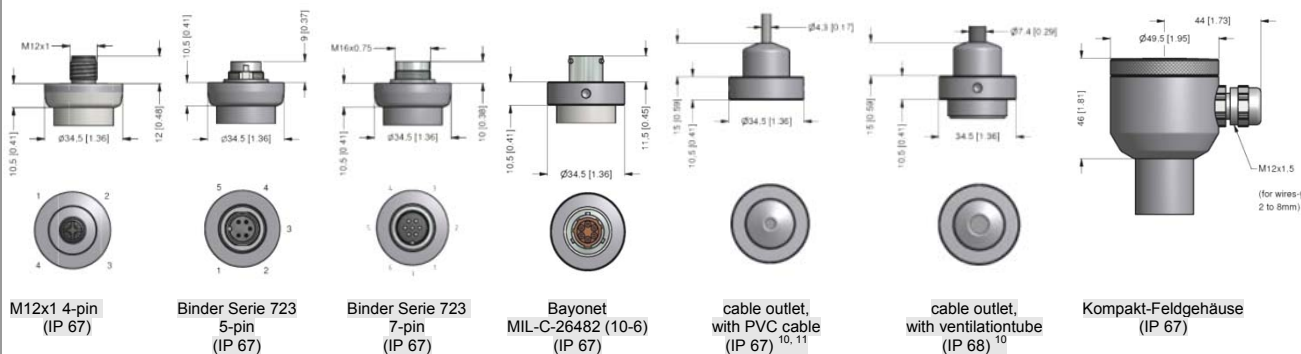


⇒ universal-Fieldhousing stainless steel 316L with cable gland M20x1,5 (ordering code 880) and other versions on request

¹⁰ different cable types and lengths available, permissible temperature depends on kind of cable


¹¹ standard: 2 m PVC cable (without ventilation tube, permissible temperature: -5 ... 70 °C)

Mechanical connection (dimensions in mm / inch)


DMP331i

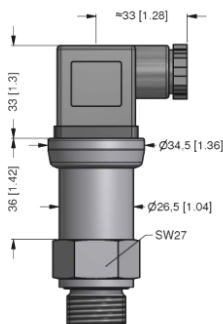

DMP 333i*

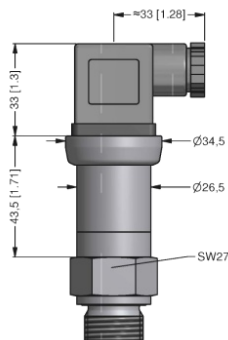

DMP 331i with RS232

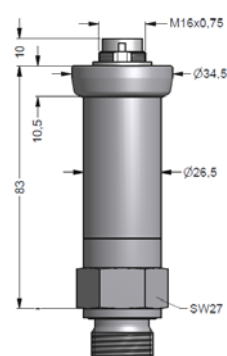

* DMP 333i: for nominal pressure $P_N > 400$ bar increases the length without IS-version by 19 mm and with IS-version by 39 mm.

pressure ports



⇒ metric threads and others on request

Windows® is a registered trade mark of Microsoft Corporation

© 2016 BD|SENSORS GmbH – The specifications given in this document represent the state of engineering at the time of publishing. We reserve the right to make modifications to the specifications and materials.

Ordering code DMP 331i/ DMP 333i

DMP 331i/ DMP 333i

$$\boxed{}\boxed{}\boxed{} - \boxed{}\boxed{}\boxed{}\boxed{} - \boxed{} - \boxed{} - \boxed{}\boxed{} - \boxed{}\boxed{} - \boxed{} - \boxed{}\boxed{}$$

Pressure					
For DMP 331i					
	gauge	1	1	0	
	absolute	1	1	1	
For DMP 333i					
	gauge ¹	1	3	0	
	absolute	1	3	1	
Input					
	[mH ₂ O]		[bar]		
For DMP 331i²					
	4	0.40	4	0	0
	10	1.0	1	0	0
	20	2.0	2	0	0
	40	4.0	4	0	0
	100	10	1	0	0
	200	20	2	0	0
	400	40	4	0	0
	600	60	6	0	0
For DMP 333i²					
	100	1	0	0	3
	200	2	0	0	3
	400	4	0	0	3
	600	6	0	0	3
For DMP 331i					
	-0.40 ... 0.40	S	4	0	0
	-1 ... 1	S	1	0	2
	-1 ... 2	V	2	0	2
	-1 ... 4	V	4	0	2
	-1 ... 10	V	1	0	3
	customer	9	9	9	9
Output					
	4 ... 20 mA / 2-wire		1		
	Intrinsic safety 4 ... 20 mA / 2-wire		E		
	0 ... 10 V / 3-wire		3		
	customer		9		
Accuracy (at nominal pressure)					
	0.1 %		1		
	customer		9		
Electrical connection					
	Male and female plug ISO 4400		1	0	0
	Male plug Binder series 723 (5-pin)		2	0	0
	Compact field housing stainless steel 1.4404 (316L)		8	5	0
	Male and female plug Binder series 723 (7-pin)		A	0	0
	Male plug M12x1 (4-pin) / metal for analog output		M	1	0
	Male plug M12x1 (4-pin) / metal for digital output		M	1	3
	Bayonet MIL-C-26482 (10-6); 2 wire		B	G	0
	Bayonet MIL-C-26482 (10-6); 3 wire		B	G	1
	Cable outlet with PVC cable ³		T	A	0
	Cable outlet ⁴		T	R	0
	customer		9	9	9
Mechanical connection					
	G1/2" DIN 3852		1	0	0
	G1/2" EN 837		2	0	0
	G1/4" DIN 3852		3	0	0
	G1/4" EN 837		4	0	0
	G1/2" DIN 3852 with ⁵ flush sensor		F	0	0
	G1/2" DIN 3852 open pressure port ⁵		H	0	0
	1/2" NPT		N	0	0
	1/4" NPT		N	4	0
	customer		9	9	9
Seals					
For DMP 331i					
	FKM		1		
	without (welded version) ^{5, 6}		2		
For DMP 333i					
	FKM		1		
	NBR		5		
	customer		9		
Special version					
	standard		1	1	1
	RS-232 interface ⁷		1	2	1
	customer		9	9	9

¹ measurement starts with ambient pressure

² pressure ranges ≤ 60 bar as DMP 331i; pressure ranges > 60 bar as DMP 333i

³ standard: 2 m PVC cable without ventilation tube (permissible temperature: -5 ... 70 °C), optionally cable with ventilation tube

⁴ cable with ventilation tube (code TR0 = PVC cable), different cable types and lengths available, price without cable

⁵ only possible for DMP 331i

⁶ welded version only with pressure ports according to EN 837

⁷ RS-232 interface only possible with el. connection Binder serie 723 (7pin)

Software, Interface and cable for DMP 331i and DMP 333i with option RS-232 have to be order separately

(Ordering code: CIS-G; Software appropriate for Windows® 95, 98, 2000, NT Version 4.0 or newer and XP)

(Ordering code: 010 0, software appropriate for Windows 95)