



DL01

Battery Powered Precision Digital Gauge for Leak Testing

Stainless Steel Sensor

class 0.05

Nominal pressure

from 0 ... 100 mbar up to 0 ... 400 bar

Special characteristics

- ▶ modular sensor concept
- ▶ data logger
- ▶ graphic display
- ▶ stainless steel housing Ø 100 mm
- ▶ communication interface USB 2.0

Optional

- ▶ accredited calibration certificate acc. to DKD / DAkkS
- ▶ IS-version zone 1
- ▶ software incl. USB converter
- ▶ service case with various accessories

Functions

- ▶ data logger interval
1s ... 99 days or fixed time
- ▶ default values for time / test duration
- ▶ zero point calibration
- ▶ and much more

The digital pressure gauge DL01 is a precision device fulfilling highest demands. It was conceived especially for leak testing or pipeline monitoring. The advantage of the DL01 is that it consists of two devices - the digital display and the pressure transmitter –which can be combined without any tools.

The DL01 can be adapted to several mounting situations quickly and without any problems within seconds without the need to store a variety of digital gauges.

Outstanding measuring qualities, an intuitive operation, as well as an integrated data logger characterize the DL01. In addition, the graphic display provides the handling and the clear presentation of the measuring procedure.

The gathered data and the relevant information (TAG or serial number, etc.) are recorded and can be read out and processed over the integrated interface via USB and PC software.

Preferred areas of use are



Plant and Machine Engineering



- Leak testing
- Pipeline monitoring




Input pressure												
Nominal pressure gauge	[bar]	-1...0	0.10	0.16	0.25	0.40	0.60	1	1.6	2.5	4	6
Nominal pressure abs.	[bar]	-	-	-	-	0.40	0.60	1	1.6	2.5	4	6
Overpressure	[bar]	5	1	1	1	2	5	5	10	10	17.5	35
Burst pressure ≥	[bar]	7.5	1.5	1.5	1.5	3	7.5	7.5	15	15	25	50
Nominal pressure gauge / abs.	[bar]	10	16	25	40	60	100	160	250	400		
Overpressure	[bar]	35	80	80	105	210	600	600	1000	1000		
Burst pressure ≥	[bar]	50	120	120	210	420	1000	1000	1250	1250		
Vacuum resistance	P _N ≥ 1 bar: unlimited vacuum resistance; P _N < 1 bar: on request											
Performance												
Accuracy ¹	standard for P _N ≥ 0.4 bar: ≤ ± 0.05 % standard for P _N < 0.4 bar: ≤ ± 0.125 %											
Long term stability	≤ ± 0.1 % FSO / year at reference conditions											
Measuring rate / Display	1 or 2 measurements per second											
¹ accuracy according to IEC 60770 – minimum value setting (non-linearity, hysteresis, repeatability) – at room temperature 20°C												
Thermal effects (Offset and Span)												
Temperature error	for nominal pressure ranges P _N ≤ 160 bar: tolerance band ≤ ± 0.2 % FSO for nominal pressure ranges P _N > 160 bar: tolerance band ≤ ± 0.75 % FSO											
compensated range	0 ... 50 °C											
Permissible temperatures												
Permissible temperatures	medium: -10 ... 55 °C environment: -10 ... 55 °C storage: -20 ... 70 °C											
Materials												
Pressure port / housing	stainless steel 1.4404 (316L)											
Display housing	stainless steel 1.4301 (304)											
Seals (media wetted)	FKM, without (welded version)											
Diaphragm	Stainless steel 1.4435 (316L)											
Media wetted parts	pressure port, seal, diaphragm											
Explosion protection												
AX16-DM01 (in preparation)	IBExU12ATEX1108 X zone 1: II 2G Ex ia IIC T4 Gb											
Miscellaneous												
Display	graphic LC display:					visible area 55 x 46 mm; (resolution 128x64) figure height 5.5 mm (displaying of pressure value) measured value display: max. 7 digits, depending on pressure range temperature display, time, 100-segment-bargraph, potential input value background illumination: illumination period and intensity adjustable						
Temperature display range	accuracy: resolution: display:					± 2 K 0,1 K -10 ... 55 °C						
adjustable units	[bar], [mbar], [psi], [inHg], [cmHg], [mmHg], [hPa], [kPa], [Mpa], [mH ₂ O], [mmH ₂ O], [inH ₂ O], [kg/cm ²]											
Data logger	Recording of pressure values and sensor temperature (min, hrs, daily at a defined time) max. 8500 values mode: linear measuring value interval adjustable											
Current consumption	without background illumination: approx. 1.3 mA with background illumination: approx. 16 mA (depending on adjusted intensity) standby mode: approx. 1.2 µA											
Supply	3x 1.5 V: Duracell Plus battery, DUR087033, AA (LR6)											
Ingress protection	IP 67											
Mounting position ²	any											
Weight	approx. 680 g											
A / D-converter resolution	16 bit											
Battery life	standard use: > 2.000 h					standby mode: at least 5 years						
Load cycles	> 100 x 10 ⁶											
CE-conformity	EMC directive: pressure equipment directive: electromagnetic compatibility:					2014/30/EU 2014/68/EU (Module A) ³ according to EN 61326						
² Pressure transmitters are calibrated in a vertical position with the pressure connection down. If this position is changed on installation there can be slight deviations in the zero point for pressure ranges P _N ≤ 1 bar.												
³ This directive is only valid for devices with maximum permissible overpressure > 200 bar												

Dimensions (in mm)


standard

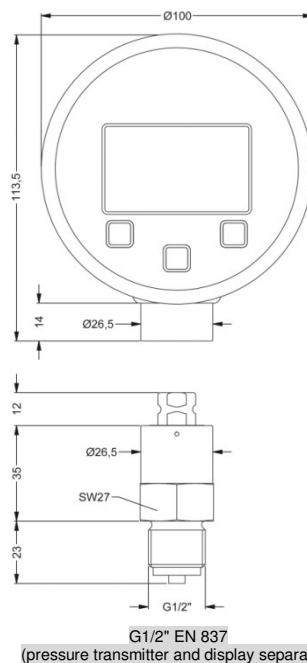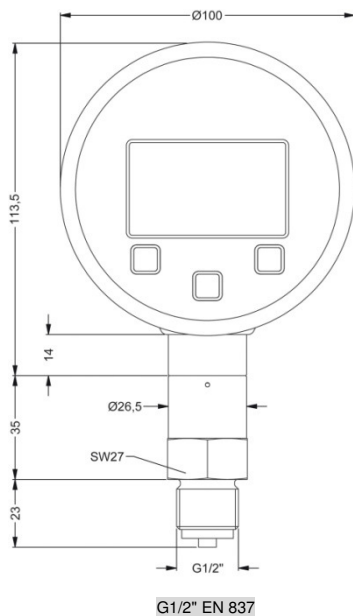




option




G1/2" DIN 3852




G1/4" DIN 3852

G1/2" DIN 3852
with flush sensor⁴G1/4" EN 837
internal thread, welded^{4,5}


1/2" NPT



1/4" NPT



G1/4" EN 837

G1/2" DIN 3852 open pressure port⁴

⇒ metrical threads and other variations on request

⁴ only possible for nominal pressure ranges $P_N \leq 40$ bar⁵ different connection versions with optional adapters possible (see accessories)


Accessories are not in scope of supply and have to be ordered separately!

BD|LOG software

Optionally the software BD|LOG and an interface cable can be ordered. The software is also available for download on our homepage.

Software:

- display of device information (serial number, pressure and temperature range,...)
- configuration area for all parameters
- download area for recorded data:
 - date
 - pressure value
 - temperature value
- actual value

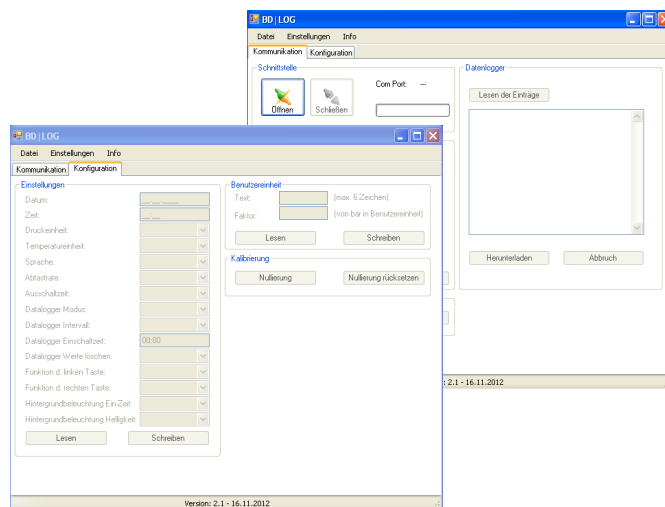


Interface cable with
integrated USB converter
l: 1.7 m

Ordering number: ZUSBCD02

Adapter for pressure port G 1/4" EN 837 internal thread, welded

G 1/4" EN 837




Adapter for pressure sensor
module with pressure port
G 1/4" EN 837 internal thread,
welded

external thread: G 1/4" EN 837
external thread: G 1/4" EN 837

Ordering number: Z5010203

G 1/2" EN 837




Adapter for pressure sensor
module with pressure port
G 1/4" EN 837 internal thread,
welded

external thread: G 1/4" EN 837
external thread: G 1/2" EN 837

Ordering number: Z5010202

* others on request

1/4" NPT




Adapter for pressure sensor
module with pressure port
G 1/4" EN 837 internal thread,
welded

external thread: G 1/4" EN 837
external thread: 1/4" NPT

Ordering number: Z5010204


1/2" NPT



Adapter for pressure sensor
module with pressure port
G 1/4" EN 837 internal thread,
welded

external thread: G 1/4" EN 837
external thread: 1/2" NPT

Ordering number: Z5010205

Hard-shell service case without accessories Service_Case_DM01		Hard shell case. Dimension in mm (L x W x H): 432 X 363 X 138
Protective cap Ordering number: Z1002648		Rubber protection
Additional batteries (only in combination with service case)		for IS-version use only 3 x 1.5 V / AA Duracell Power Plus
Seal set (only in combination with service case)		Flat seal copper for mechanical connections according to EN 837
PTFE seal tape Nr. 498.505 (only in combination with service case)		Seal tape for mechanical connections material: PTFE (Teflon) Temperature range: -200 ... 280 °C
Wrench (only in combination with service case)		Wrench SW 27
Calibration test pump KHP 35 Ordering number: 1002637		The KHP 35 calibration test pump is used to generate pressure and vacuum for checking, adjusting and calibrating mechanical and electronic pressure measuring instruments by comparative measurements. These pressure tests may be carried out in laboratories, workshop or on site at the measuring point. pressure: 0 ... 35 bar vacuum: 0 ... -0,95 bar weight: ca. 510 g dimension: ca. 220 x 105 x 63 mm
Adapter for calibration test pump		
Test unit connection: Adapter to connect the test unit to the calibration test pump.		Adapter to connect the test unit to the calibration test pump. external thread: G 1/4" EN 837 to: internal thread: G 1/4" DIN 3852 (No. 5008909) or G 1/2" EN o. DIN (No. 5007896) or 1/4" NPT (No. 5007897) or 1/2" NPT (No. 5007898) others on request
Reference unit connection: Adapter to connect the digital gauge to the calibration test pump		Adapter to connect the pressure sensor module DM01 to the calibration test pump. external thread: G 1/2" EN 837 to: internal thread: G 1/4" DIN 3852 (No. 5012498) or G 1/2" DIN 3852 (No. 5012519) or 1/4" NPT (No. 5012499) or 1/2" NPT (No. 5012500) others on request

© 2017 BD/SENSORS GmbH – The specifications given in this document represent the state of engineering at the time of publishing. We reserve the right to make modifications to the specifications and materials.

Ordering code DL01

1. position: digital display for Precision Digital Pressure Gauge DL01

DL01-

--	--	--

Digital pressure gauge DL01			
with communication interface	A	2	1
IS with communication interface	A	2	E

2. position: transmitter for Precision Digital Pressure Gauge DL01

DL01

□	□	□	-	□	□	□	-	□	-	□	□	-	□	□	□	-	□	□	□
---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---

Pressure	
	gauge absolute ¹
M	0 P
M	0 Q
P	Q
Input	[bar]
0.10	1
0.16	1
0.25	1
0.40	
0.60	
1.0	
1.6	
2.5	
4.0	
6.0	
10	
16	
25	
40	
60	
100	
160	
250	
400	
-1 ... 0	
customer	
Version	
non IS	
IS	
Accuracy	
standard for $P_N \geq 0.4$ bar	
standard for $P_N < 0.4$ bar	
customer	
Mechanical connection	
G1/2" DIN 3852	
G1/2" EN 837	
G1/4" DIN 3852	
G1/4" EN 837	
G1/2" DIN 3852	
with flush sensor ²	
G1/2" DIN 3852 open pressure port ²	
1/2" NPT	
1/4" NPT	
G 1/4" EN837 internal thread, welded ^{2,3}	
customer	
Seals	
FKM	
customer	
Special version	
standard	
customer	

¹ absolute pressure possible from 0.4 bar² only possible for $P_N \leq 40$ bar

³ different connection versions with optional adapters possible (see accessories)

ordering example:

device DL01:

position 1: DL 01-A21

position 2: M0P-1001-B1-200-1-000

only display: position 1: DL01-A21

only transmitter: position 2: M0P-1001-B1-200-1-000

Accessories DL01

Accessories		
USB converter (incl. software BD LOG)		ZUSBCD02
service case (without accessories)		Service_Case_DM01
Protective cap		Z1002648
Additional batteries (3 x 1,5 V / AA Duracell Power Plus) ⁴		1002798
Seal set ⁴		5008886
PTFE seal tape ⁴		1002724
wrench ⁴		1002722
Calibration test pump (KHP)		1002637
Adapter for DM01		
G1/4" EN 837 male - G1/4" EN 837 male		Z5010203
G1/4" EN 837 male - G1/2" EN 837 male		Z5010202
G1/4" EN 837 male - 1/4" NPT male		Z5010204
G1/4" EN 837 male - 1/2" NPT male		Z5010205
Adapter for KHP - test unit connection		
G1/4" EN 837 m - G1/4" DIN3852 fm		5008909
G1/4" EN 837 m - G1/2" EN 837/DIN3852 fm		5007896
G1/4" EN 837 m - 1/4" NPT fm		5007897
G1/4" EN 837 m - 1/2" NPT fm		5007898
Adapter for KHP - reference unit connection		
G1/2" EN 837 m - G1/4" DIN3852 fm		5012498
G1/2" EN 837 m - G1/2" DIN3852 fm		5012519
G1/2" EN 837 m - 1/4" NPT fm		5012499
G1/2" EN 837 m - 1/2" NPT fm		5012500

⁴ only in combination with service case

03.04.2017

© 2017 BD|SENSORS GmbH - The specifications given in this document represent the state of engineering at the time of publishing. We reserve the right to make modifications to the specifications and materials.

