




## COLLECT & **TRANSFER METEO DATA** FAST & SECURE

- ✔ **Plug & Play**  
without any further adjustment, quick and easy to connect and to use
- ✔ **Always at hand**  
send your data to the cloud or store it at your own secured network
- ✔ **Low power data logger**  
designed to be powered by a solar panel, no external power necessary
- ✔ **Remote data acquisition**  
fast and continues remote logging with the integrated GSM module

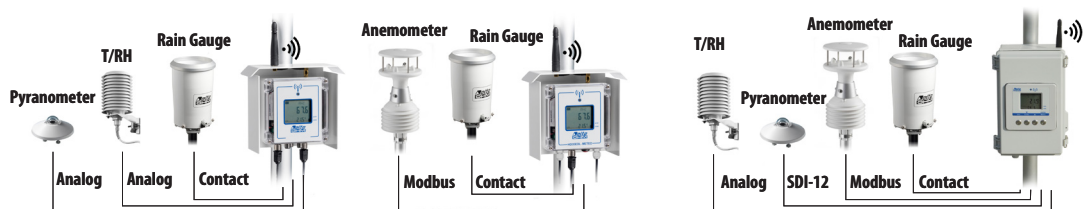

TECHNICAL SPECIFICATIONS	HD33M.2	HD33M-MB.2	HD33MT.4 HD33MT.4/E
Connectivity	2G		4G/3G/2G + ETHERNET (only in 4/E model)
Power Supply	7...30 Vdc		if integrated battery is used: 18...28 Vdc (externally powered) or 12 Vdc (photovoltaic panel)  if integrated battery is not used: 7...28 Vdc (externally powered)
Power Consumption	< 2 mA during measurement / < 0.8 A peak during GSM activity		< 4 mA during measurement / < 1 A peak during GSM activity
Battery charger from solar panel	With additional external power supply unit		✓
Integrated lead acid battery			optional
Switched power supply output		Active only when external sensors have to be powered	Active only when external sensors have to be powered
Antenna	External, included		
Measuring & logging Interval	1, 2, 5, 10, 15, 30 seconds / 1, 2, 5, 10, 15, 30, 60 minutes		
Internal Memory	Circular management or stop logging if memory is full		
Number of samples (depending on the number of the detected quantities)	from 128,000 to 440,000	from 120,000 to 424,000	from 242,850 to 858,070
Alarm	Acoustic through internal buzzer. Sending of alarm e-mail and SMS.		Sending of alarm e-mail and SMS. Two voltage-free (NO) contact alarm outputs.
Operating Conditions	-40...+70 °C / 0...100 %RH without display -20...+70 °C / 0...100 %RH with display		
Internal clock	Normal stability		High stability ± 2 ppm (0...+40°C)/± 5 ppm (-40...+70°C)
Display	Optional custom LCD		
Connection to PC	USB port with mini-USB connector - Free software		
Dimensions (excluding antenna)	122 x 120 x 56 mm		270 x 170 x 110 mm
Protection Degree	IP67	IP67	IP65
Inputs	5 analog inputs for dedicated Delta OHM sensors	- 1 input for RS485 MODBUS-RTU sensors - 1 contact input	- 4 analog standard inputs - 2 voltage free contact inputs - 1 RS485 MODBUS-RTU input - 1 SDI-12 input - 1 passive T/RH probe
Temperature	✓	optional	✓
Relative Humidity	✓	optional	✓
Atmospheric Pressure	optional internal sensor	optional	optional internal sensor
Solar Radiation	✓	optional	✓
Wind speed and directions	✓	optional	✓
Rainfall quantity	✓	✓	✓



We look forward to your enquiry:  
Phone +39 049 8977150  
sales@deltaohm.com

#### Delta OHM S.r.l.

Single Member Company subject to direction and coordination of  
GHM MESSTECHNIK GmbH

Via Marconi 5 | 35030 Caselle di Selvazzano (PD) | ITALY

In order to ensure the quality of our instruments, we may have to develop our products. We may make changes or corrections at any time. Check on our website to make sure your documentation is up to date.