



BAROLI

Battery Powered Digital Pressure Gauge

- ▶ standard version: piezoresistive stainless steel sensor
- ▶ low cost version: ceramic sensor
- ▶ nominal pressure ranges from 0 ... 100 mbar up to 0 ... 600 bar

Description

The battery powered digital pressure gauge **BAROLI** has been specially designed for applications in hydraulics and pneumatics. It could be installed easily and quickly in situ. The display module is continuously rotatable so that a clear readability is guaranteed even in unusual installation positions.

Operation

The device can be operated menu-driven via three pushbuttons in the touchpad. Besides showing information about the nominal pressure range as well as minimal and maximal pressure of the process, several pressure units (bar, mbar, PSI, mWts, inHg, cmHg, mmHg, kPa, MPa) and the position of decimal point can be set. Upper and lower range of the measured range can be recalibrated by the customer. Defaults can be loaded again via menu.



Applications

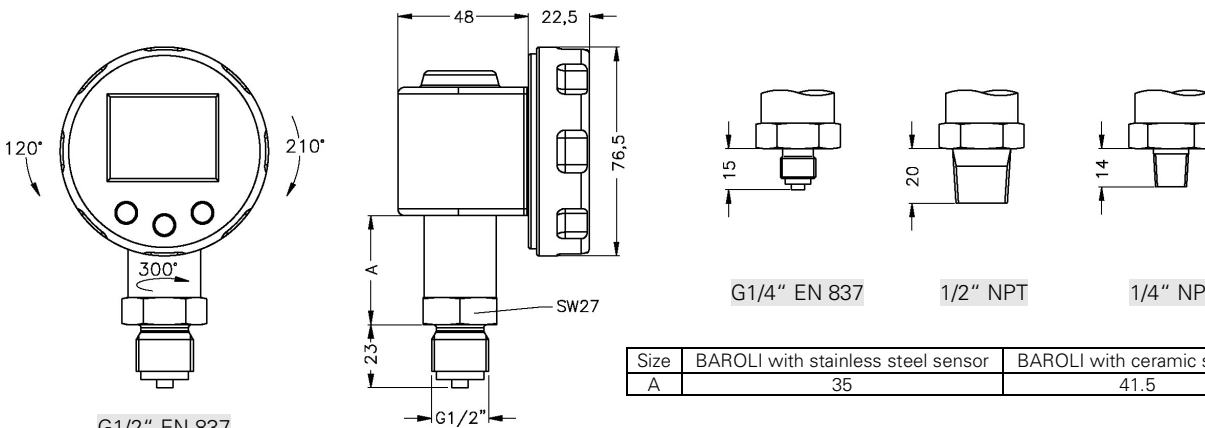
- ▶ hydraulics
- ▶ pneumatics
- ▶ mechanical engineering

- ▶ rugged, rotatable plastic housing
- ▶ 4.5 digit LC display for showing the measured value (digit height 11 mm)
- ▶ 6-digit additional display for the unit (digit height 7.5 mm)
- ▶ easy configuration via three push buttons
- ▶ accuracy:
0.125 / 0.250 % FS BFSL
(0.25 / 0.50 % FS IEC 60770)
- ▶ ingress protection IP 65
- ▶ mechanical connection
 - G1/2" EN 837
 - G1/4" EN 837
 - 1/2" NPT
 - 1/4" NPT

Characteristics



BAROLI
Digital Pressure Gauge

Input pressure with stainless steel sensor															
Nominal pressure gauge / abs. [bar]	0.10	0.16	0.25	0.4	0.6	1.0	1.6	2.5	4.0	6.0	10	16	25	40	
Permissible overpressure [bar]	0.5	0.5	1	1	3	3	6	6	20	20	20	60	60	100	
Nominal pressure gauge / abs. [bar]	60		100		160		250		400		600				
Permissible overpressure [bar]	140		340		340		600		600		1000				
Input pressure with ceramic sensor															
Nominal pressure gauge / abs. [bar]	1.6	2.5	4	6	10	16	25	40	60	100	160	250	400	600	
Permissible overpressure [bar]	4	4	10	10	20	40	40	100	100	200	400	400	600	600	
Performance															
Accuracy	stainless steel sensor with $P_N > 0.4$ bar: stainless steel sensor with $P_N \leq 0.4$ bar: ceramic sensor:							IEC 60770 ²			BFSL				
								$\leq \pm 0.250$ % FS			$\leq \pm 0.125$ % FS				
								$\leq \pm 0.500$ % FS			$\leq \pm 0.250$ % FS				
								$\leq \pm 0.500$ % FS			$\leq \pm 0.250$ % FS				
Measuring rate	5/sec.														
¹ accuracy according to IEC 60770 – limit point adjustment (non-linearity, hysteresis, repeatability)															
Thermal errors / Permissible temperatures															
Thermal errors for stainless steel sensor (Offset and Span)	nominal pressure P_N [bar]			≤ 0.1		≤ 0.25		≤ 0.4		≤ 1		> 1			
	tolerance band [% FS]			$\leq \pm 2$		$\leq \pm 1.5$		$\leq \pm 1$		$\leq \pm 1$		$\leq \pm 0.75$			
	TC, average [% FS / 10 K]			± 0.3		± 0.2		± 0.14		± 0.1		± 0.07			
	in compensated range [°C]					0 ... 50						0 ... 70			
Thermal errors for ceramic sensor (Offset and Span)	$\leq \pm 0.2$ % FS / 10 K in compensated range -25 ... 85 °C														
Permissible temperatures	medium: -20 ... 85 °C				environment: -20 ... 70 °C				storage: -30 ... 80 °C						
Materials															
Display housing	PA 6.6, polycarbonate														
Seals (media wetted)	stainless steel sensor: $P_N \leq 40$ bar: FKM, EPDM $P_N > 40$ bar: NBR others on request ceramic sensor: $P_N < 100$ bar: FKM $P_N \geq 100$ bar: NBR others on request														
Pressure port / diaphragm	stainless steel 1.4571 (316Ti) / stainless steel 1.4435 (316L) or ceramics Al_2O_3 96 %														
Media wetted parts	pressure port, seals, diaphragm														
Miscellaneous															
Display	LC display, visible range 40 x 30 mm; 4.5-digit 7-segment main display, digit height 11 mm, range of indication ± 19999 ; 6-digit 14-segment additional display, digit height 7.5 mm														
Electromagnetic compatibility	emission and immunity according to EN 61326														
Mechanical stability	vibration: 5 g RMS (20 ... 2000 Hz) shock: 100 g / 11 msec.														
Supply	3.6 V lithium batteries; 2 pieces (type 1/2 AA)														
Data memory:	EEPROM (non-volatile)														
Ingress protection	IP 65														
Installation position	any ²														
Weight	approx. 300 g														
AD-converter solution	14 bit														
Operational life of battery	standby mode: approx. 5 years														
Mech. operational life	$> 100 \times 10^6$ pressure cycles														
² The digital pressure gauge is calibrated in a vertical position with the pressure connection down. If this position is changed on installation there can be slight deviations in the zero point for devices with stainless steel sensor and pressure range $P_N \leq 1$ bar.															
Dimensions (in mm)															
															
Size		BAROLI with stainless steel sensor					BAROLI with ceramic sensor								
A		35					41.5								

BAROLI

□□□□ - □□□□ - 0 - □ - 0 K 0 - □□□□ - □ - □ - □ - □ - □□□□

¹ ceramic sensor possible for pressure ranges from 1.6 bar up to 400 bar