



DMP 331P

Industrial Pressure Transmitter

Process Connections With
Flush Welded Stainless Steel
Diaphragm

accuracy according to IEC 60770:
standard: 0.35 % FSO
option: 0.25 % FSO

Nominal pressure

from 0 ... 100 mbar up to 0 ... 40 bar

Output signals

2-wire: 4 ... 20 mA / 3-wire: 0 ... 10 V
others on request

Special characteristics

- ▶ hygienic version
- ▶ diaphragm with low surface roughness
- ▶ CIP / SIP cleaning up to 150 °C
- ▶ vacuum resistant

Optional versions

- ▶ IS-version
Ex ia = intrinsically safe for gases and dust
- ▶ SIL 2
according to IEC 61508 / IEC 61511
- ▶ Diaphragm in
Hastelloy® or Tantalum
- ▶ cooling element for media
temperatures up to 300 °C

The pressure transmitter DMP 331P was designed for use in the food / beverage and pharmaceutical industry. The compact design with hygienic versions makes it possible to achieve an outstanding performance in terms of accuracy, temperature behavior and long term stability.

The modular construction concept allows a combination of various process connections with different filling fluids and a cooling element. Several electrical connections complete the profile of DMP 331P.

Preferred areas of use are



Food and Beverage



Pharmaceutical Industry

Material and test certificates

- ▶ inspection certificate 3.1
according to EN 10204
- ▶ test report 2.2
according to EN 10204



DMP 331P

Industrial Pressure Transmitter

Technical Data

Input pressure range ¹									
Nominal pressure gauge / abs.	[bar]	-1...0	0.10	0.16	0.25	0.40	0.60	1	1.6
Overpressure	[bar]	5	0.5	1	1	2	5	5	10
Burst pressure ≥	[bar]	7.5	1.5	1.5	1.5	3	7.5	7.5	15
Nominal pressure gauge / abs.	[bar]	2.5	4	6	10	16	25	40	
Overpressure	[bar]	10	20	40	40	80	80	105	
Burst pressure ≥	[bar]	15	25	50	50	120	120	210	
Vacuum resistance		P _N ≥ 1 bar: unlimited vacuum resistance P _N ≤ 1 bar: on request							
¹ consider the pressure resistance of fitting and clamps									
Output signal / Supply									
Standard		2-wire: 4 ... 20 mA / V _S = 8 ... 32 V _{DC}							
Option IS-protection		2-wire: 4 ... 20 mA / V _S = 10 ... 28 V _{DC}							
Options 3-wire		3-wire: 0 ... 20 mA / V _S = 14 ... 30 V _{DC} 0 ... 10 V / V _S = 14 ... 30 V _{DC}							
Performance									
Accuracy ²		standard: nominal pressure < 0.4 bar : ≤ ± 0.5 % FSO nominal pressure ≥ 0.4 bar: ≤ ± 0.35 % FSO option: nominal pressure ≥ 0.4 bar: ≤ ± 0.25 % FSO							
Permissible load		current 2-wire: R _{max} = [(V _S – V _{S min}) / 0.02 A] Ω current 3-wire: R _{max} = 500 Ω voltage 3-wire: R _{min} = 10 kΩ							
Influence effects		supply: 0.05 % FSO / 10 V load: 0.05 % FSO / kΩ							
Long term stability		≤ ± 0.1 % FSO / year at reference conditions							
Response time		2-wire: < 10 msec 3-wire: ≤ 3 msec							
² accuracy according to IEC 60770 – limit point adjustment (non-linearity, hysteresis, repeatability)									
Thermal effects (Offset and Span) ³ / Permissible temperatures									
Nominal pressure P _N	[bar]	-1 ... 0			< 0.40			≥ 0.40	
Tolerance band	[% FSO]	≤ ± 0.75			≤ ± 1,5			≤ ± 0.75	
in compensated range	[°C]	-20 ... 85			0 ... 50			-20 ... 85	
Permissible temperatures ⁴		medium: -40 ... 125 °C for filling fluid silicon oil -10 ... 125 °C for filling fluid food grade oil electronics / environment: -40 ... 85 °C storage: -40 ... 100 °C							
Permissible temperature medium for cooling element 300°C		filling fluid silicon oil				overpressure: -40 ... 300 °C		vacuum: -40 ... 150 °C ⁵	
		filling fluid food grade oil				overpressure: -10 ... 250 °C		vacuum: -10 ... 150 °C ⁵	
³ an optional cooling element can influence thermal effects for offset and span depending on installation position and filling conditions.									
⁴ max. temperature of the medium for nominal pressure gauge > 0 bar: 150 °C for 60 minutes with a max. environmental temperature of 50 °C									
⁵ also for P _{abs} ≤ 1 bar									
Electrical protection									
Short-circuit protection		permanent							
Reverse polarity protection		no damage, but also no function							
Electromagnetic compatibility		emission and immunity according to EN 61326							
Mechanical stability									
Vibration according to DIN EN 60068-2-6		G 1/2": 20 g RMS (25 ... 2000 Hz)				others: 10 g RMS (25 ... 2000 Hz)			
Shock according to DIN EN 60068-2-27		G 1/2": 500 g / 1 msec				others: 100 g / 1 msec			
Filling fluids									
Standard		silicon oil							
Options		food grade oil, compliant with 21CFR178.3570 (Mobil SHC Cibus 32; Category Code: H1; NSF Registration No.: 141500) others on request							
Materials									
Pressure port		stainless steel 1.4404 (316 L)				others on request			
Housing		stainless steel 1.4404 (316 L)							
Option compact field housing		stainless steel 1.4305 (303), cable gland brass, nickel plated							others on request
Seals (media wetted)									
Standard		FKM (recommended for medium temperatures ≤ 200 °C)							
Optional		FFKM (recommended for medium temperatures > 200 °C) others on request Clamp, dairy pipe, Varivent®: without							
Diaphragm									
Standard		stainless steel 1.4435 (316 L)							
Optional		Hastelloy® C-276 (2.4819) Tantalum on request							
Media wetted parts		pressure port, seal, diaphragm							

DMP 331P

Industrial Pressure Transmitter

Technical Data

Explosion protection (only for 4 ... 20 mA / 2-wire)

Approvals DX 19-DMP 331P	IBExU 10 ATEX 1068 X / IECEx IBE 12.0027X zone 0: II 1G Ex ia IIC T4 Gazone 20: II 1D Ex ia IIIC T 85°C Da		
Safety technical maximum values	U _i = 28 V, I _i = 93 mA, P _i = 660 mW, C _i ≈ 0 nF, L _i ≈ 0 μH, the supply connections have an inner capacity of max. 27 nF to the housing		
Ambient temperature range	in zone 0: -20 ... 60 °C with p _{atm} 0.8 bar up to 1.1 bar in zone 1 or higher: -20 ... 70 °C		
Connecting cables (by factory)	cable capacitance:	signal line/shield also signal line/signal line: 160 pF/m cable inductance: signal line/shield also signal line/signal line: 1 μH/m	
Miscellaneous			
Option SIL ⁶ 2	according to IEC 61508 / IEC 61511		
Current consumption	signal output current:	max. 25 mA	signal output voltage: max. 7 mA
Weight	min. 200 g (depending on process connection)		
Installation position	any (standard calibration in a vertical position with the pressure port connection down; differing installation position for P _N ≤ 2 bar have to be specified in the order)		
Operational life	> 100 x 10 ⁶ pressure cycles		
CE-conformity	EMC Directive: 2004/108/EC		
ATEX Directive	94/4/EG		

⁶ only for 4 ... 20 mA / 2-wire

Wiring diagrams

2-wire-system (current)	3-wire-system (current / voltage)

Pin configuration

Electrical connection	ISO 4400	Binder 723 (5-pin)	M12x1 / metal (4-pin)	field housing	cable colours (DIN 47100)
Supply +	1	3	1	IN +	wh (white)
Supply -	2	4	2	IN -	bn (brown)
Signal (only 3-wire)	3	1	3	OUT+	gn (green)
Shield	ground pin	5	4		ye/gn (yellow / green)

Electrical connections (dimensions in mm)

standard	option
ISO 4400 (IP 65)	Binder Series 723 (IP 67)
M12x1 4-pin (IP 67)	compact field housing (IP 67)
cable outlet with PVC cable (IP 67) ⁷	cable outlet, cable with ventilation tube (IP 68) ⁸
⇒ universal field housing stainless steel 1.4404 (316 L) with cable gland M20x1.5 (ordering code 880) and other versions on request	

⁷ standard: 2 m PVC cable without ventilation tube (permissible temperature: -5 ... 70°C)

⁸ different cable types and lengths available, permissible temperature depends on kind of cable


DMP 331P

Industrial Pressure Transmitter

Technical Data


Mechanical connection (dimension in mm)

Standard

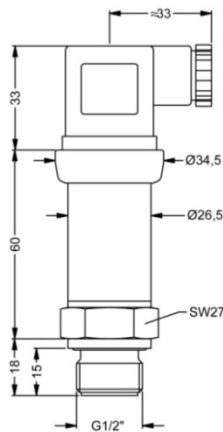


G1/2" flush DIN 3852⁹

Option

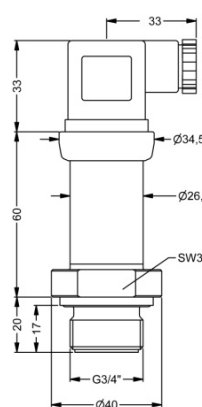


G 3/4" flush DIN 3852
with ISO 4400

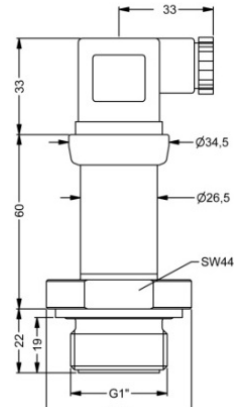


G1" flush DIN 3852
with ISO 4400


Option

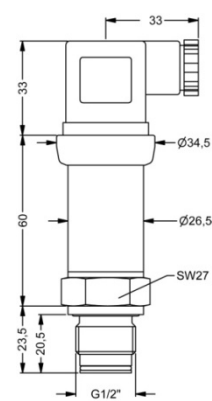


G1/2" flush
with radial o-ring⁹

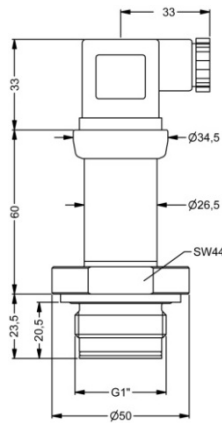


G1" flush
with radial o-ring (P_N ≤ 2 bar)

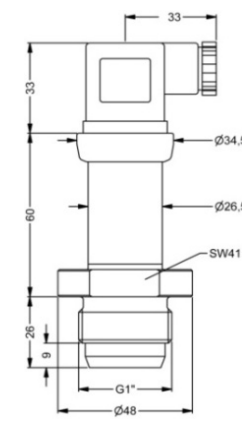


G1" cone
with ISO 4400




cooling element 300 °C



Varivent®
PN ≤ 25 bar



dairy pipe (DIN 11851)
with ISO 4400



Clamp (DIN 32676)
with ISO 4400

dimension in mm			
size	DN 25	DN 40	DN 50
A	23	32	45
B	44	56	68.5
P _N [bar]	≤ 40	≤ 40	≤ 25

dimension in mm				
size	¾"	DN 25	DN 32	DN 50
A	14	23	32	45
B	25	50.5	50.5	64
P _N [bar]	≤ 8	≤ 16	≤ 16	≤ 16

- ⇒ **SIL- and SIL-Ex version: total length increases by 26.5 mm!**
- ⇒ **metric threads and other versions on request**

⁹ possible only for P_N ≥ 1 bar

This datasheet contains product specification, properties are not guaranteed. Subject to change without notice.

Ordering code DMP 331P

DMP 331 P

			-				-		-		-			-			-		-		-			
--	--	--	---	--	--	--	---	--	---	--	---	--	--	---	--	--	---	--	---	--	---	--	--	--

[illegible]

¹ standard: 2 m PVC cable without ventilation tube (permissible temperature: -5 ... 70°C), others on request

² cable with ventilation tube (code TR0 = PVC cable), different cable types and lengths available, price without cable

³ The cup nut has to be pre-mounted by production of pressure transmitter with electrical connection field housing in combination with the mechanical connection dairy pipe.

The cup nut has to be ordered as separate position.

⁴ possible only for $P_N \geq 1$ bar

⁵ possible only for $P_N \leq 2$ bar