



## HD37AB17D HD37B17D

- ▶ [ GB ]  
Relative Humidity -  
Temperature - CO - CO<sub>2</sub>  
Datalogger



## [ GB ] Description

**HD37AB17D** and **HD37B17D** instrument are **data loggers** able to measure and memorize simultaneously the following parameters:

- Relative Humidity **RH**
- Environment temperature **T**
- Carbon monoxide **CO** (only **HD37AB17D**)
- Carbon dioxide **CO<sub>2</sub>**

**HD37AB17D** and **HD37B17D** instruments have the ability to investigate and monitor the indoor air quality.

Typical applications include checking air quality inside buildings occupied by people (schools, hospitals, auditoria, canteens, etc.); and work places to optimize the comfort and to generally check for small leaks of CO with danger of explosions or fire. This analysis allows the management of conditioning plants (temperature and humidity) and ventilation (recycle air/hour) in order to reach a double purpose: getting a good quality of the air in accordance with ASHRAE and IMC regulations and energy saving.

**HD37AB17D** and **HD37B17D** are instruments which are very useful to fight the so-called syndrome of sick building.

**RH** (Relative Humidity) measurement is obtained with a capacitive sensor.

**T** temperature is measured with a high precision NTC sensor.

The **CO** measurement (Carbon monoxide, only for **HD37AB17D**) is made by an electrochemical cell with two electrodes indicated to detect the presence of Carbon monoxide, lethal for men, in his living or working environment.

The **CO<sub>2</sub>** measurement (Carbon dioxide) is obtained with a special infrared sensor (NDIR technology: Non-Dispersive Infrared Technology) that, thanks to the use of double filter and a special measurement techniques, guarantees accurate and stable measurements over time. The infrared sensor is equipped with a protection membrane which provides protection from dust particles and aggressive air agents to assure the sensor's long life.

**HD37AB17D** and **HD37B17D** are **data loggers** able to memorize the detected measurements at an interval set by the user.

**HD37AB17D** and **HD37B17D** are connected to the PC by **USB** input.

**DeltaLog13** communication **software** via the USB port, designed to perform data transfer, data collection and recording and printing of all the instrument parameters and stored measurements. In addition the software allows the calibration adjustments of the RH, CO (only **HD37B17D**) and CO<sub>2</sub> sensors.

Using appropriate procedure, the Software DeltaLog13 can evaluate the parameter **% OA** (percentage of external air), according to the following formula:.

whereas:

$X_r = \text{CO}_2$  in return air

$X_s = \text{CO}_2$  in the outlet air

$X_o = \text{CO}_2$  in the external air

The power supply of the instrument is provided by a 2 Ni-MH **rechargeable** batteries package (code BAT-20), that that allows 8 hours of continuous working in acquisition mode.

### Technical Features

Dimensions	275 mm x 45 mm x 40 mm
Weight	230 g (batteries included)
Materials	ABS
Mains power supply (code <b>SWD06</b> )	Batteries charger <b>100-240Vac/6Vdc-1A</b>
Batteries	Package with 2 rechargeable batteries 1.2V type AA (NiMH)
Autonomy	8 hours of continuous working in measurement mode
Current absorbed with instrument off	200µA
Instrument working temperature	0°C ... 50°C
Working relative humidity	0%RH ... 95%RH no condensed
Temperature / Storage humidity	-25°C ... +70°C / 10%RH ... 90%RH no condensed
Safety of the stored data	Unlimited

### Connections

USB interface	USB 2.0 cable B type Baudrate 460800
Charger Batteries power supply (code <b>SWD06</b> )	2 - poles connector (positive at the centre) Output voltage: <b>6Vdc</b> Maximum current: 1600mA (9, 60 VA Max).

### Measuring rate

### Storage capacity

### Logging interval

### Printing interval

### Sensor Features

#### Relative Humidity RH

#### Sensor protection

#### Measurement range

#### Sensor working range

#### Accuracy

#### Resolution

### 1 sample every three seconds

20000 Records

Every records includes the following:

- date and time
  - measurement of the carbon dioxide (CO<sub>2</sub>)
  - measurement of the carbon monoxide (CO- only **HD37AB17D**)
  - measurement of the relative humidity (RH)
  - measurement of the temperature (T)
- selectable within: 3,6,9,12,15,18,21,24,30,33,36,39,42,48,51,54,57,60 seconds.
- The stored values represent the average value of the samples that are stored every three seconds.

selectable within: 3,6,9,12,15,18,21,24,27,30,33,36,39,42,48,51,54,57,60 seconds.

The printed values represent the average value of the samples that are stored every three seconds.

Capacitive sensor

Net filter made of stainless steel (on request filter P6 in AISI316 sintered 20µm or filter P7 in PTFE sintered 10µm)

0...100 % RH

-40...+80°C

±2% in the remaining range

0,1%



Thermal effects	±2% on all the temperature range
Hysteresis and repeatability	1% RH
Response time ( $T_{90}$ )	< 20 sec. (air speed = 2m/sec) without filter
Long term stability	1%/year

#### Temperature T

Sensor type	NTC 10K $\Omega$
Measurement range	-40...+60°C
Accuracy	±0.2°C ±0.15% of the measure
Resolution	0,1°C
Response time ( $T_{90}$ )	< 30 sec. (air speed = 2m/sec)
Long term stability	0.1°C/year

#### Carbon monoxide CO (only HD37AB17D)

Sensor	Electro chemical cell
Measurement range	0...500ppm
Sensor working range	-5...50°C
Accuracy	±3ppm+3% of the measure value
Resolution	1ppm
Response time ( $T_{90}$ )	< 50 sec.
Long term stability	5% of the measure/year
Expected life	> 5 years in normal environmental conditions

#### Carbon dioxide CO<sub>2</sub>

Sensor	NDIR with a double wave length
Measurement range	0...5000 ppm
Sensor working range	-5...50°C
Accuracy	±50ppm+3% of the measurement
Resolution	1ppm
Thermal effects	0,1% f.s./°C
Response time ( $T_{90}$ )	< 120 sec. (air speed = 2m/sec)
Long term stability	5% of the measure/ 5 years

#### Ordering codes

**HD37AB17D:** The kit consisting of: **HD37AB17D** instrument to measure CO (Carbon monoxide), CO<sub>2</sub> (Carbon dioxide), RH (Relative Humidity), T (Temperature), **DeltaLog13** Software, USB cable code **CP22**, **SWD06** power supply, **BAT-2** batteries package, instruction manual, carrying case.

**HD37B17D:** instrument to measure CO<sub>2</sub> (Carbon dioxide), CO (Carbon monoxide), RH (Relative Humidity), T (Temperature), **DeltaLog13** Software, USB cable code **CP22**, **SWD06** power supply, **BAT-2** batteries package, instruction manual, carrying case.

#### Accessories:

**VTRAP20:** Instrument tripod, maximum height 270mm.

**SWD06:** 100-240Vac/6Vdc-1A mains voltage power supply.

**BAT-20:** Replacement batteries pack for HD37AB17D and HD37B17D instruments with integrated temperature sensor.

**P5:** Stainless steel grid protection for probes diameter 14, thread M12×1.

**P6:** Sintered stainless steel 10 $\mu$  grid protection, for probes diameter 14, thread M12×1.



**P7:** 10 $\mu$ , PTFE protection for probes diameter 14, thread M12×1.

**P8:** Stainless steel and Pocan protection for probes diameter 14, thread M12×1.

**HD75:** Saturated solution for testing the Relative Humidity with 75% HR, complete with adapter for probes diameter 14, thread M12×1.

**HD33:** Saturated solution for testing the Relative Humidity with 33% HR, complete with adapter for probes diameter 14, thread M12×1.



**MINICAN.12A:** Cylinder of nitrogen for the calibration of CO and CO<sub>2</sub> at 0ppm. Volume 12 litres. **With adjustment valve.**

**MINICAN.12A1:** Cylinder of nitrogen for the calibration of CO and CO<sub>2</sub> at 0ppm. Volume 12 litres. **Without adjustment valve.**

**ECO-SURE-2E CO:** Spare CO sensor.

**HD37.36:** Kit connection pipe between instrument and MINICAN.12A for the calibration of CO.

**HD37.37:** Kit connection pipe between instrument and MINICAN.12A for the calibration of CO<sub>2</sub>.

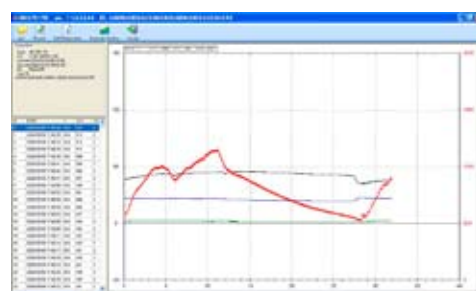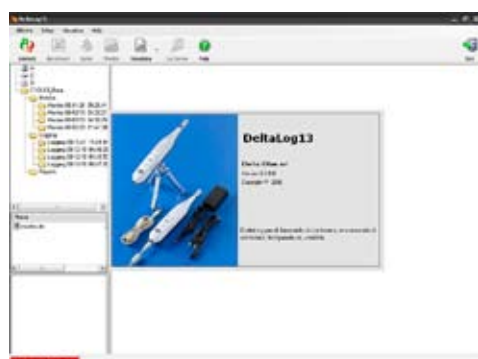

Manufacture of portable and bench top instruments  
Current and voltage loop transmitters  
Temperature - Humidity - Pressure  
Air speed - Light - Acoustics  
pH - Conductivity - Dissolved Oxygen - Turbidity  
Elements for weather stations - Thermal Microclimate



#### SIT CENTRE N°124

Temperature - Humidity - Pressure - Air speed  
Photometry/Radiometry - Acoustics

#### CE CONFORMITY

- **Safety:** EN61000-4-2, EN61010-1 Level 3
- **Electrostatic discharge:** EN61000-4-2 Level 3
- **Electric fast transients:** EN61000-4-4 livello 3, EN61000-4-5 Level 3
- **Voltage variations:** EN61000-4-11
- **Electromagnetic interference susceptibility:** IEC1000-4-3
- **Electromagnetic interference emission:** EN55020 class B

